


EXAMPLE MODULES


LOW GLASS



HIGH GLASS

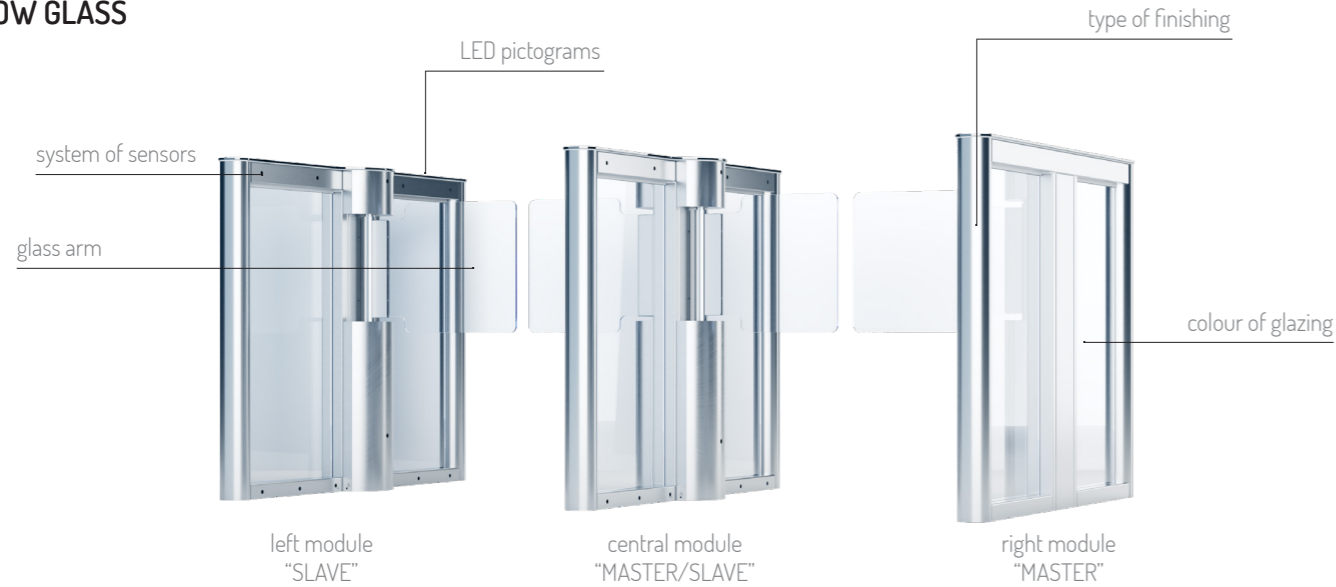

SG-3 MODULES

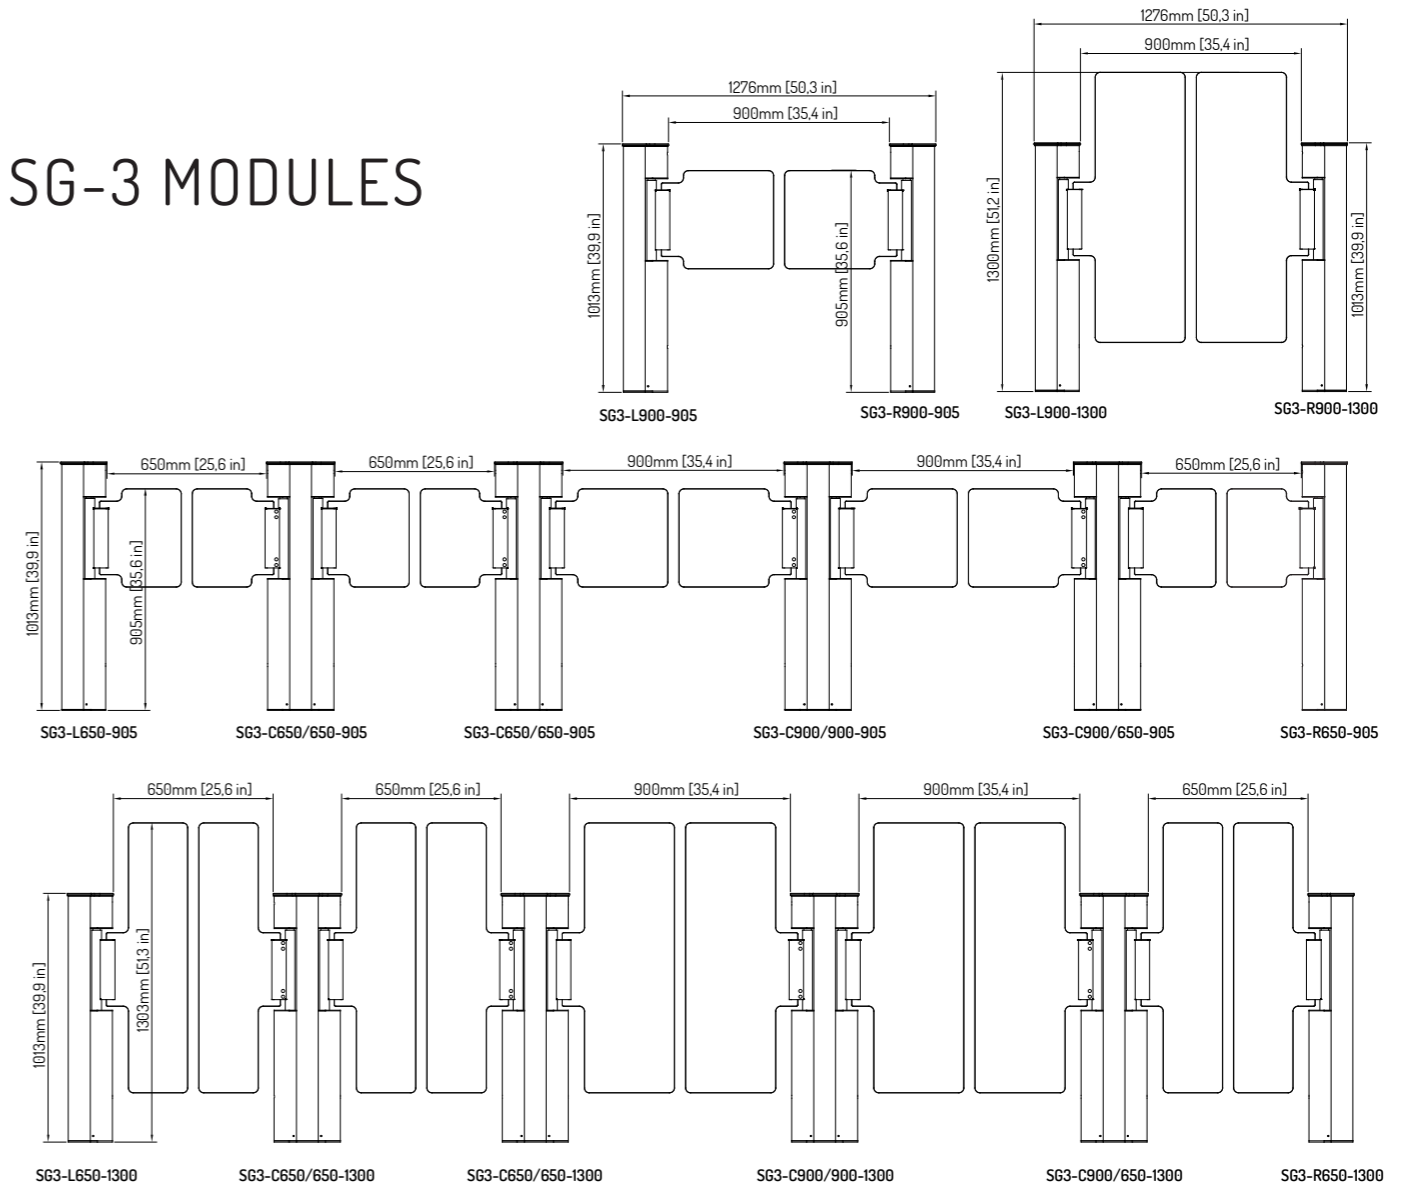

Module	Width of the passage	Glass Height
SG-3-L650-905-INOX*-CLEAR**	650	905
SG-3-L650-1300-INOX*-CLEAR**	650	1300
SG-3-L900-905-INOX*-CLEAR**	900	905
SG-3-L900-1300-INOX*-CLEAR**	900	1300
SG-3-R650-905-INOX*-CLEAR**	650	905
SG-3-R650-1300-INOX*-CLEAR**	650	1300
SG-3-R900-905-INOX*-CLEAR**	900	905
SG-3-R900-1300-INOX*-CLEAR**	900	1300
SG-3-C650/650-905-INOX*-CLEAR**	650/650	905
SG-3-C650/900-1300-INOX*-CLEAR**	650/900	1300
SG-3-C900/650-905-INOX*-CLEAR**	900/650	905
SG-3-C900/650-1300-INOX*-CLEAR**	900/650	1300

ATTENTION:
 * standard type of housing finish - AISI 304 stainless steel (INOX); Non-standard type of housing finish - stainless steel, powder coated, RAL color
 ** standard type of glazing - colorless; Non-standard type of glazing - specify the color at the stage of ordering

SG-3 - TECHNICAL PARAMETERS

MECHANISM

- Auto system to slow down the movement of arms approaching full-open/full-closed positions,
- Fast and precise wing drive system,
- Passage clearing system in case of power failure (auto wing unlocking),
- Arm positioning system (movement synchronization).

THE DEVICE CONSTRUCTION

- Simplified fixing to a foundation due to glued anchor bolts (anchors not included),
- The gate is made of AISI 304 stainless steel with black powder-coating finish.

ELECTRONIC SYSTEM

- Steering input (0V signal) for each traffic direction individually (e.g. a card reader, a control panel, a coin dispenser, a remote control, a firefighting system),
- Feedback signal output (0V signal) informing about a passage of a person based on an authorising signal,
- A higher priority input for excluding the section from operation (e.g. from the building management system),
- The highest priority input for clearing/opening the passage section (e.g. from the firefighting system),
- Functions: option to set operating modes (free passage or passage with authorization for each traffic direction separately), storing control signals during an operating cycle, sound alarm, LED alarm, variable wing movement speed, auto calibration and quick setup using the built-in control panel.

MARKINGS OF DEVICES

Model	Module	Glass Height	Finish Options	Glass Color Options
SG-3	L650	905	INOX	CLEAR

Examples of markings:

- SG-3-C650-1300-RAL5010-DARK BLUE - central module (width of the passage 650mm), glass height: 1300mm, finish type: RAL5010, glass color: blue.
- SG-3-R900-905-RAL9006-BRONZE - right module (width of the passage 900mm), glass height: 905mm, finish type: RAL9006, glass color: brown.

NOTE:

Standard finish includes AISI 304 (INOX) stainless steel and clear glazing.
 Standard glass height is 905mm.
 Any non-standard dimensions of the passage must be agreed with the manufacturer.




SPECIFICATIONS

PARAMETER	SG-3 -L/R	SG-3-C
Power supply voltage:	24 V DC	24 V DC
Maximum power consumption:	90 W	180 W
Minimum power consumption:	30 W	60 W
Current draw at start-up:	4 A	8 A
Operation temperature:	0° to +50° C [32° to 122°F]	0° to +50° C [32° to 122°F]
Storage temperature:	-30° to +60° C [-22° to 140°F]	-30° to +60° C [-22° to 140°F]
IP protection rate:	IP 40	IP 40
Maximum operation humidity:	85 %	85 %
Wing opening/closing time:	-1 sec	-1 sec
Main cabinet material:	INOX AISI 304	INOX AISI 304
Device wing:	hardened glass 8 mm	hardened glass 8 mm

OPTIONAL EQUIPMENT*

Name	Description
Transformer	A 230/24V transformer or 110/24V
Control panel	A control panel for the pedestrian traffic manual control

* Optional equipment is not included with the device.

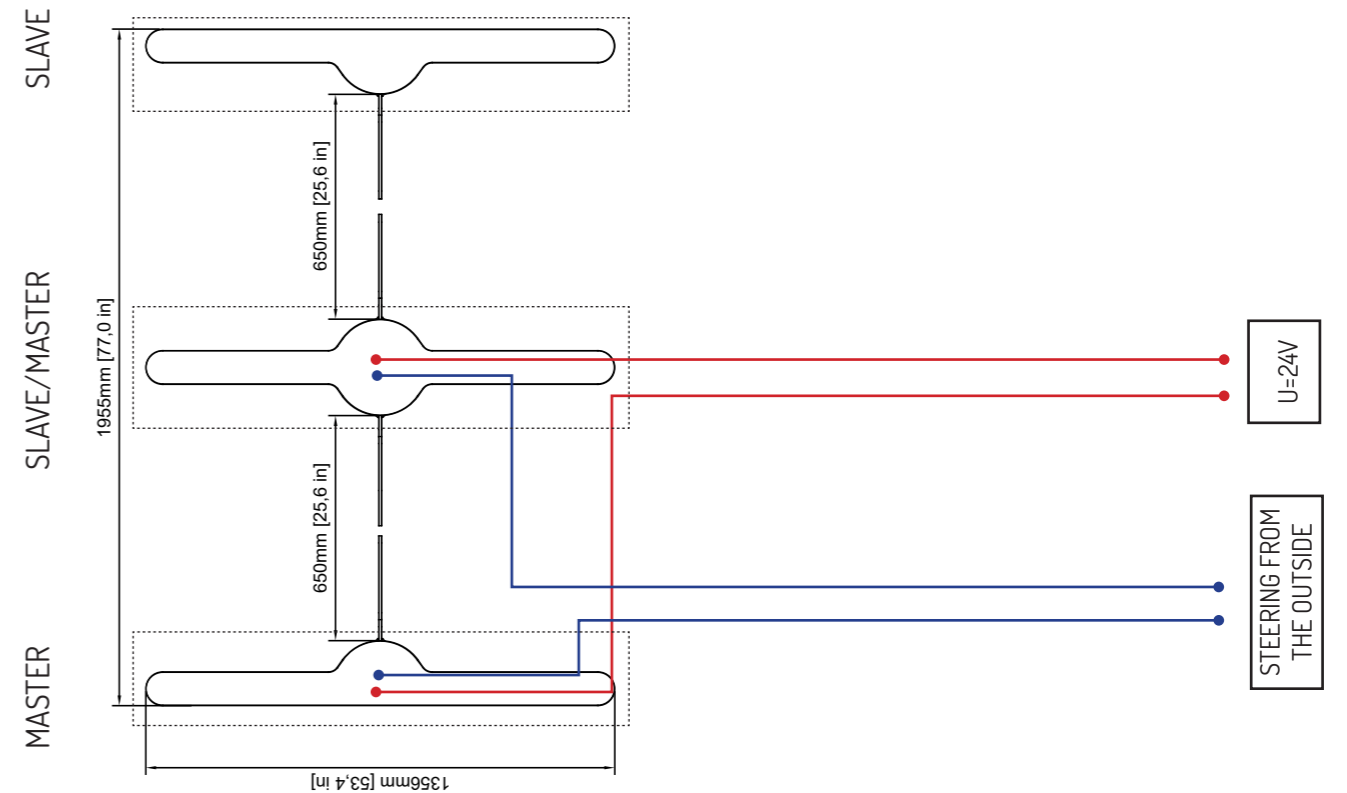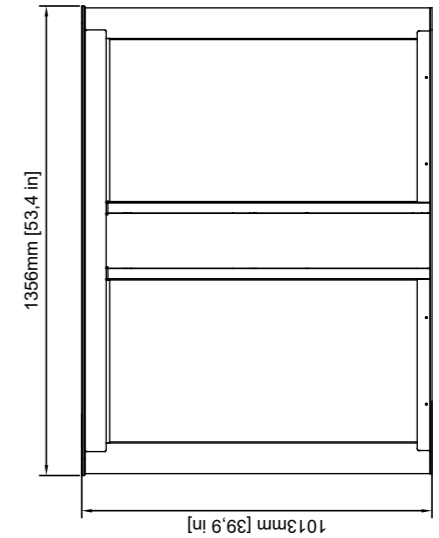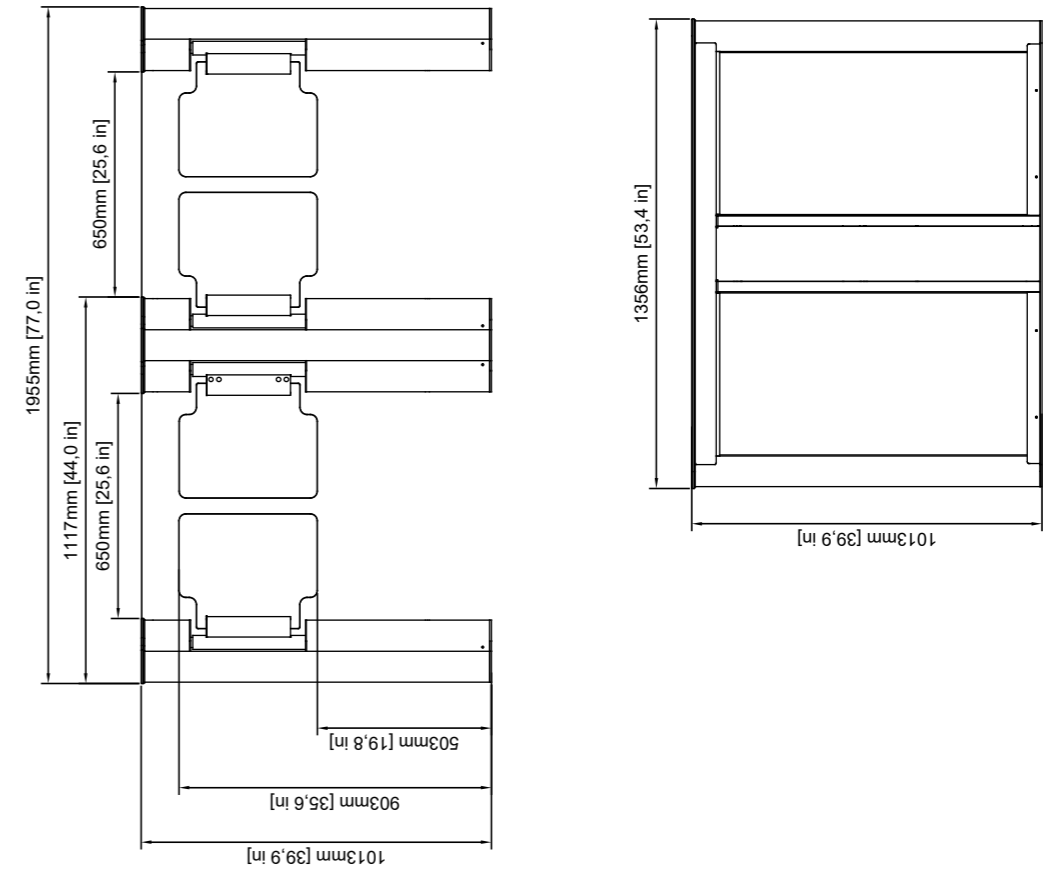

KEY:

- Steering from the outside - an S/UTP strand
- 24 V supply - 0MY wire 3x1.5mm
- Foundation